



C250 Mecalinea

RM50





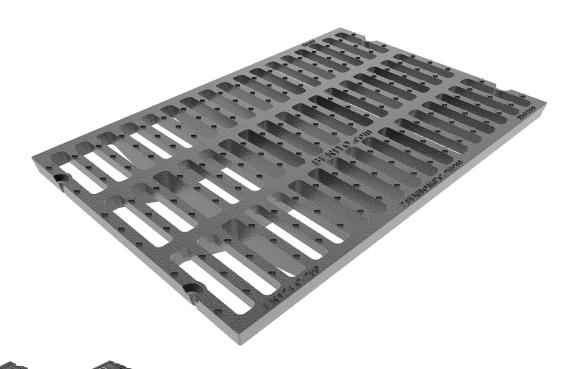



	REF.	С	D	Н	dm2	UN.
	RM25	750	250	30	7	50
	RM35	750	350	27	13	30
	RM40	750	400	27	16	30
	RM50	750	500	28	19	30
	RM60	750	600	27	24	10
	RM70	750	700	27	28	10

Mecalinea C2 is designed to support soft traffic. Perfect for installing on roads with an ADT of 500 to 1.000, particularly hard shoulders and ditches.

- Made from spheroidal graphite ductile cast iron, according to ISO 1083 (Type 500-7) and standard EN 1563.
- Compliant with the European standard UNE EN-124.
- Weight and/or chain device closure (optional).
- RMD joint system between grilles (optional).
- Metal non-slip surface.
- Coated with non-toxic, non-flammable and non-polluting water-soluble black paint.

Project sheet | CAD | HD image

