


Bench with ductile iron legs treated with Ferrus, a protective process that guarantees high resistance to corrosion.



Ref.	A	B	H	H1
UM397E/UM397EAL*	1965	600	830	430
UM397BE/UM397BEAL*	1965	545	460	-
UM397SE/UM397SEAL*	565	600	830	430



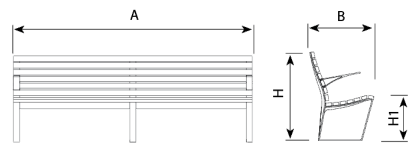

The Ferrus treatment consists of three layers applied after shot cleaning all impurities: an electrolytic bath, an epoxy coating and a grey polyester paint coating.

52 x 40 mm tropical wood boards treated with Lignus, a fungicide, insecticide and waterproof agent.

Stainless steel screws.

Optional:

- AG3 cast iron legs

Recommended anchoring: by means of M10 expansion bolts depending on the surface and the project.

